




HDPE Flap Valve Lifiable Gate Combination WAT.POT-K

Two way Flap Valve and Sluice Gate; Down-Flap Valve Functions-Lifted-Sluice Gate Functions

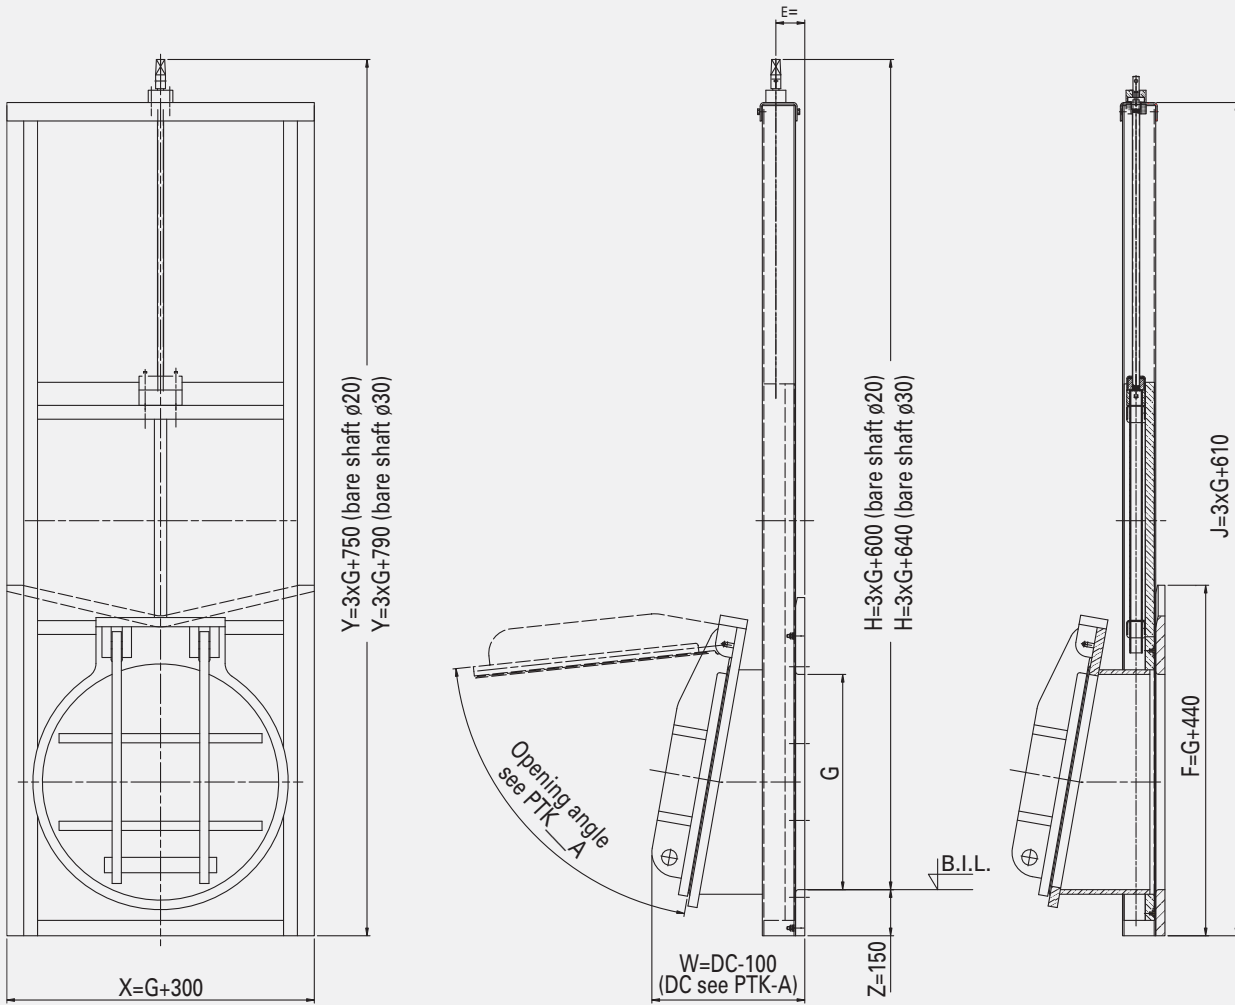

Product

TBS HDPE liftable flap valve type POTK

Application

non-return flap valve suitable for permanent under water use mounted on a penstock frame so that the flap valve can be lifted. When the door of the penstock is lowered the product functions as a non-return flap valve. In lifted position the opening is free and flow can go in both directions

Standard pressure for the flap valve

1 meter water column permanent from top of opening, 5 meter water column short duration (72 hours) from bottom of opening higher pressures on request

www.westatlantictech.com / www.flapvalvehdpe.com sales@westatlantictech.com +902 455 4455